



Digital radio extension of DSL for rural New Zealand

The rural and remote areas of New Zealand have been blessed with relatively good telephone service as a legacy of the pioneering efforts of the New Zealand Post Office, and later Telecom, in the expansion of the access network by means of radio. Equipment such as single subscriber country set links and multi-access systems, often combined with digital microwave radio connected rural exchanges, have all played a vital part in connecting this country.

These solutions were designed for providing voice service and most implementations provide poor performance when used with the modems necessary for dial-up Internet access. Despite this, radio remains the rural access method of choice, covering difficult terrain effectively.

Radio options

Subscriber multi-access radio, or SMAR, is a radio concentrator technology that provides broad-brush coverage suitable for low subscriber densities, but dial-up rates are limited to less than 30 kbit/s in even modern versions of these systems. The technology relies on statistical behaviour of subscribers to concentrate telephone calls on to a limited number of radio circuits. However congestion can result as calling patterns alter when customers access the Internet and call hold times increase significantly, upsetting the advantages of concentration.

Newer broadband wireless systems offer convenient urban service, but cannot reach distant rural subscribers and usually have no voice service available. In the future, 3G cellular systems may provide some rural coverage but the premiums charged for mobile broadband are not a good fit with user expectations for fixed access charges.

At the other extreme in terms of complexity are country set subscriber radio systems. While these low-power analogue systems are cost effective for connections for one or at most two voice circuits, dial-up performance is typically limited to 19.2 kbit/s and often much less. Something like 800 of these systems are in service in New Zealand.

A lot of this country set technology was actually developed in New Zealand. Most systems were installed in the seventies and eighties before cellular phones were invented and wireless was just an old fashioned word your grandfather used to use.

Technical Case study

The Aprisa XE in brief

- Highly flexible point-to-point microwave link
- Accommodates all data, voice and IP traffic requirements on a single future-proof platform
- Industry-leading platform: goes the greatest distance, delivering the greatest capacity

Since then metro and urban New Zealand has gained relatively easy access to broadband via cable, DSL (Digital Subscriber Loop), and recently, fixed wireless systems. While fibre optic cable now connects much of the larger rural centres, many individual subscribers and small rural communities are beyond the limited reach of DSL, the underlying technology of Telecom New Zealand's wired broadband service JetStream. It is fair to say that rural subscribers wanting broadband Internet access are not well served by technology available to date as distance and economics continue to limit broadband options.

The extension of broadband access to rural subscribers is as much a technical challenge as it is economic. Project Probe has provided a welcome focus on this issue and recent events have shown just how difficult the challenge really is.

Satellite options

While satellite has its place in serving the most isolated areas, satellite-based systems suffer from performance, ownership and cost issues. One-way and two-way satellite systems suffer from latency and often fail to meet response time expectations of customers using more interactive applications. Internet game players in particular consider satellite-based systems unusable, as a review of online user forums will show.

The satellite segment of a typical Australasian service provider has an in-country delay some 20 times the delay of the equivalent terrestrial path. One-way satellite requires a dial-up modem return path and so does not have the "always-on" advantage of cable or DSL.

Two-way satellite, such as that offered by Telstra in Australia, has been proposed as a solution to Probe's Region 15. However two-way service requires an expensive transmit-capable satellite terminal. Low costs are often touted, but on inspection the cheaper systems have a number of limitations. While downlink rates are good with light system loading, rates fall as more users come on-line because all users share the downlink capacity. Compression algorithms are often implemented to speed web browsing, limiting the protocols used for video conferencing, VPN, and other applications.

Existing consumer satellite broadband services are asymmetric, a pool of uplink slots are shared by all users on a contention basis. While adequate to convey mouse click or keyboard entries, the uplink capacity is insufficient for a web server.

Perhaps the biggest drawback for a network operator such as Telecom New Zealand is that customer revenue must be shared with the satellite's owner.



Aprisa XE

A way forward


Ernie Newman, TUANZ Chief Executive, noted in the 16th Edition of Telecommunication Review, □DSL is still the stand-out technology as the broadband revolution sweeps the world like a bushfire□. This technology is an ideal way of providing broadband if you control the local loop or have an unbundled access arrangement.

Let's look at how Telecom might leverage its existing DSL and local-loop assets via low-capacity digital radio to give a new addition to New Zealand's rural broadband toolbox.


Conventional DSL service is implemented by DSLAM (Digital Subscriber Access Multiplexer) equipment located at an exchange feeding individual subscriber DSL modems over the local loop to the customer. Service range is limited to about 5 kilometres by cable conditions and current technology. The digital transmission is carried by modulation at frequencies above the voice band, allowing telephone and data service to operate independently. The DSLAM connects to the core network via a high capacity ATM connection.

The modulation used by DSL on the local loop cannot be directly carried by radio-based access equipment but if the DSLAM function is moved to the remote end of the radio link then a common digital radio bearer can accommodate both the digital coded voice and ATM/IP data. The rapid development of DSLAM technology has enabled the implementation of compact DSLAM equipment suitable for remote installation and economic support of as few as eight subscribers.

This miniDSLAM technology can be combined with a thin route point-to-point digital radio system to provide normal DSL service over paths in excess of 100 kilometres. Subscribers can use standard DSL modems and need not even be aware that their service is provided by radio.

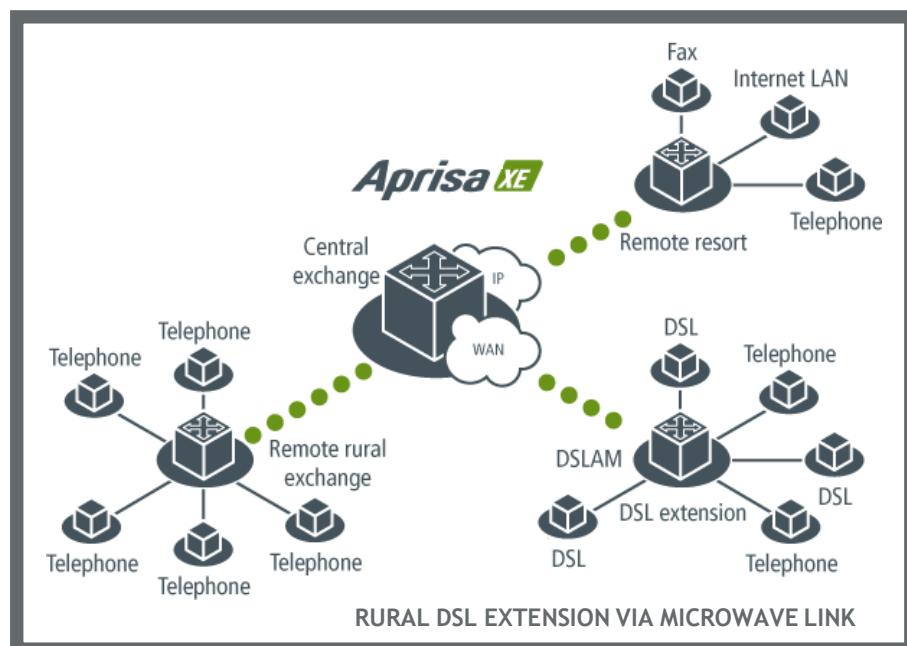

Aprisa XE

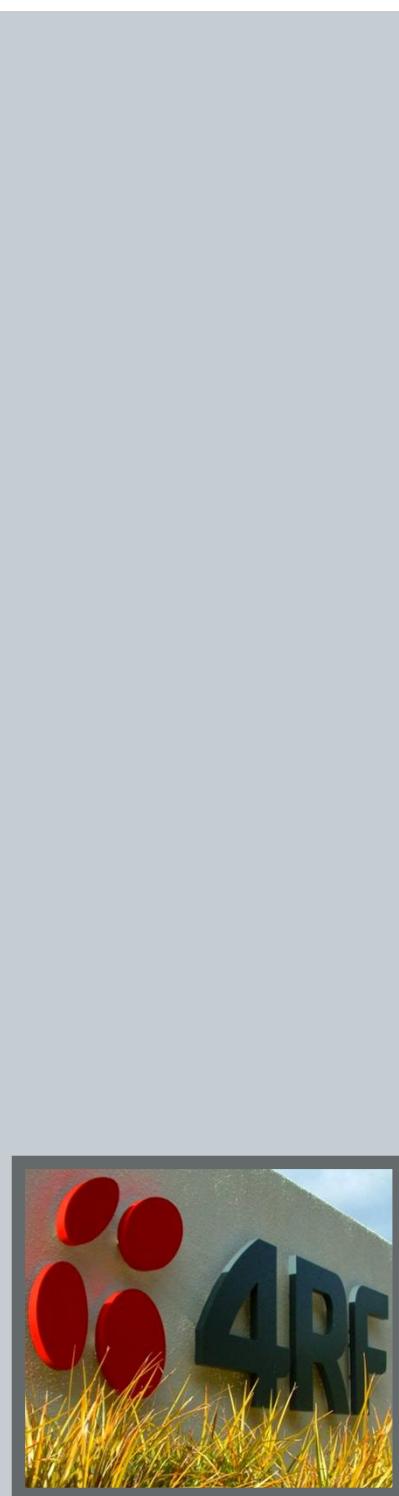

ABOUT 4RF

Operating in more than 130 countries, 4RF provides radio communications equipment for critical infrastructure applications. Customers include utilities, oil and gas companies, transport companies, telecommunications operators, international aid organisations, public safety, military and security organisations. 4RF point-to-point and point-to-multipoint products are optimized for performance in harsh climates and difficult terrain, supporting IP, legacy analogue, serial data and PDH applications.

Copyright © 2012 4RF Limited. All rights reserved. This document is protected by copyright belonging to 4RF Limited and may not be reproduced or republished in whole or part in any form without the prior written consent of 4RF Limited. While every precaution has been taken in the preparation of this literature, 4RF Limited assumes no liability for errors or omissions, or from any damages resulting from the use of this information. The contents and product specifications within it are subject to revision due to ongoing product improvements and may change without notice. Aprisa and the 4RF logo are trademarks of 4RF Limited. Version 1.2.0